SUPERIOR
CONTAINER SOLUTIONS

SELF CONTAINED COMPACTORS

The New Industry Leader
For Waste Compaction Solutions.

SELF-CONTAINED COMPACTORS

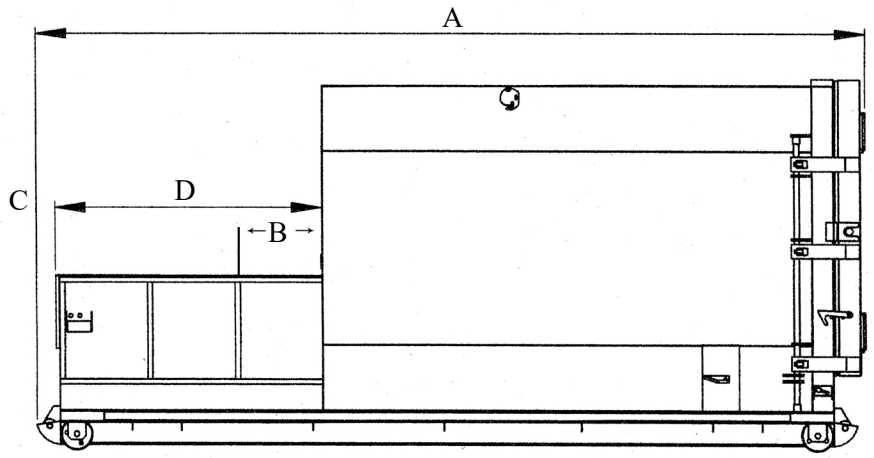

Single Cylinder				
Overall Length	A	B	C	D
15 Cubic Yards	192	40	103	90
20 Cubic Yards	222	40	103	90
25 Cubic Yards	245	40	103	90
30 Cubic Yards	275	40	103	90
Twin Cylinder				
Overall Length	A	B	C	D
15 Cubic Yards	169	40	103	65
20 Cubic Yards	205	40	103	65
25 Cubic Yards	228	40	103	65
30 Cubic Yards	252	40	103	65
35 Cubic Yards	275	40	103	65

Self Contained Comapctor	SCS170	SCS170HD	SCS260	SCS260HD
Manufacturer Rating	2.00	2.00	2.00	2.00
Ram Face (in)	30 x 60	30 x 60	28 x 60	28 x 60
Ram Penetration (in)	6	6	6	6
Hydraulic Cylinder	6 x 3	6 x 3	(2) 4 x 2.5	(2) 4 x 2.5
Clear Top Opening (in)	40 x 70	40 x 70	40 x 60	40 x 60
Hydraulic Pressure PSI (max)	2600	2600	2600	2600
Max Force Rating (lb)	73,512	73,512	49,796	49,796
Motor HP Tri-Volt	10	10	10	10
Electri Control Voltage	120VAC	120 VAC	120VAC	120 VAC
Charge Box Floor (in)	1/2	1/2 AR	1/2	1/2 AR
Ram Bottom (in)	9/16	9/16	9/16	9/16
Chrage Box Sides (in)	1/4	1/4	1/4	1/4

Standard Features
Advanced Warning Light
Multi Cycle Timer
Motor To Pump Coupler
30mm Allen Bradley Controls
Pressure Gauge
Adjustable Backdoor Hinge
2 x 6 : 1/4 Main Rails

Optional Features
Oil Heater
Guide Rails / Wheel Tracks
Wear Strips on Main Rails
Custom Color
12' Remote With Pressure Gauge
Heavy Duty Ground Rollers
QD's Plumb Both Sides
Auto Start
Sonaizaire Odor Control System
Fixed Breaker Bar Teeth
Low Oil Shut Down
Low Oil Temperature

Steel Options
Dog House
Open Hopper
Full Enclosure
Chute
Walk On Deck
Drive On Deck

SUPERIOR CONTAINER SOLUTIONS

602-313-8075

superiorcontainersolutions.com

Pictures are for illustration only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Products must be used with the same practice and in accordance with said regulation and standards. Products meet all current ANSIZ245.5 and all OSHA standards.